THE GOLD STANDARD IN BALLAST WATER TREATMENT™

Hyde GUARDIANGOLD® BALLAST WATER TREATMENT SYSTEM



The Hyde Marine

- Long History 100+ years in maritime industry and 25+ years in diverse water treatment solutions & UV Treatment technology
- Proven Partner Market/World Leader in (UV) Ballast Water Treatment Systems (BWTS)
- Experienced Pioneer in ballast water research and positioned as a technology leader and industry expert, particularly in the RETROFIT market
- Reputable & Reliable IMO Type Approved with BWTS operating for over 10 years; well positioned to assist with global and U.S. compliance

Key Benefits of HYDE GUARDIAN Gold® BWTS

- Economic low installation, operating, and consumable costs
- Flexible & Compact supplied as
- Easy to install retrofittable or dry docking
- Compatible integrates seamlessly with existing ballast system, installed pumps (low pressure drop) and shipboard power system (low power consumption - full power operation of 75kW per 1,000m³/hr)
- a skid-mounted or modular system Easy to use simple, automatic operation and minimal shipboard maintenance and effect on crew or vessel operations
- while in service with no downtime Proven robust design ensures consistent performance in long-term shipboard use
 - Chemical-free no effect on coatings
 - Safe low risk for safety of crew and vessel

"System adjustment, commissioning, and product demonstration to class and crew members was completed in just two days by Hyde Marine staff. We were pleased to discover that Hyde Marine's ballast water treatment system is compact, simple, and reliable. Additionally, all of the system components are easy to access for maintenance."

- Novoship Site Office Manager following installation of two Hyde GUARDIAN BWTS on two LPG carriers

Key milestones in the evolution 1865 PHyde Windlass Co. (Bath, Maine) of the Hyde Marine technology 1969 of Hyde Marine (Cleveland, OH), and product line for ballast water treatment

1996 • Hyde Marine and University of Michigan Ballast Water Study

1997 Great Lakes Ballast Water Technology Demonstration Project

2000 First Ballast Water Treatment System M/S Regal Princess

2001 BWT Systems Installed on Four Commercial Ships

2003 First Hyde GUARDIAN System M/S Coral Princess

2006 GUARDIAN Modular System M/S Celebrity Mercury

2008 Six GUARDIAN Systems for Royal Navy CVF Aircraft Carriers

USCG STEP Approval Coral Princess

2009 Hyde GUARDIAN® BWTS IMO Type Approval

2013 b Hyde GUARDIAN BWTS USCG AMS Approval

Introduction & IMO Type Approval of Hyde GUARDIAN Gold® BWTS

2014 400th Unit Sold



Introducing the

Hyde GUARDIAN Gold® Ballast Water Treatment System

The Hyde GUARDIAN Gold® Ballast Water Treatment System (BWTS) is the new effective and reliable solution that combines efficient filtration and Ultraviolet (UV) disinfection. Standard systems are available for flow rates from 60 m³/hr up to 6,000 m³/hr. With its simple design and ability to be skid mounted, the system can be easily installed in existing ships where retrofits are required in crowded machinery spaces as well as in new ship construction.

The smallest footprint on the market

Control & Power Panels –

- Operates entire system with larger touchscreen LCD panel
- come complete on skid system

Compact Filter —

- and flow to ballast tanks

UV Treatment Chamber & Central Outlet

One of the smallest UV reactor depending on total ballast water

Ballast Water Inlet

Common inlet for ballasting

Skid -

- Easy to install

HG250G BWTS

Size Matters

Compact Filter System

As a technical leader in ballast water treatment, Hyde Marine remains on the forefront of testing and innovation. Over ten years ago Hyde Marine tested available filters, and now with advances in filters and the introduction of filters designed specifically for ballast water treatment, the company decided to revisit filter testing in a challenge water that combined low salt content (<1 psu) and was 1000 times more productive than the IMO required organic particle loading count.

The results led to the addition of high performing screen filters that help address the space constrained retrofit market providing a 50% reduction in footprint.

Final screen filters selected provide the following advantages:

- Reduction in power/energy requirements (30% reduction in peak power consumption during backwashing)
- · Continuous flow to tanks during ballasting
- Improved ballast times and increased flow to tanks
- Ability to handle heavy organic and sediment loading
- Simple operation and low maintenance requirements
- Corrosion-free materials of construction
- Reduced micron ratings (30-40 micron) to improve removal rates
- Optimized for retrofit installations






FC200

FC400

Larger Touch Screen

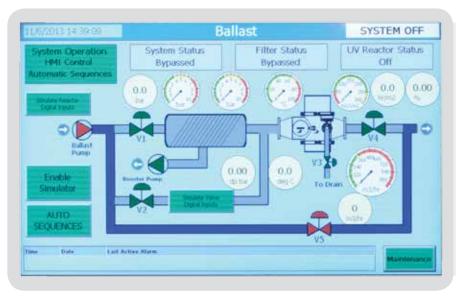

- Improved touch screen Operator Interface (OIT) and upgraded PLC controller with increased speed and memory capacity
- Expanded modes of one-touch operation:
 - Tank Stripping
 - Gravity Ballasting
 - Internal Transfer
 - Emergency Ballasting
 - Maintenance Mode
- One-touch, external access (and download capability) of the data log via USB drive
- GPS interface to receive data from ship signal for inclusion in the data log



The Hyde GUARDIAN Gold[®] BWTS uses high intensity ultraviolet (UV) treatment for disinfection. With more than 25 years of experience in UV Treatment technology, Hyde Marine carefully designed the UV chamber for minimum pressure drop, optimum dose distribution, and compatibility with the marine operating environment.

UV dosage results from a combination of lamp power, flow path, and exposure time. The flow characteristics through the Guardian UV chamber are optimized to make best use of the UV power provided.

UV Disinfection Advantages:

- Automatic operation with very little crew attention
- Effective not affected by water salinity, temperature, or hold time in the ballast tank
- 100% safe without side effects
- Organisms cannot build resistance against UV
- No increased corrosion risk as with chemical oxidants
- No transportation, storage, or handling of chemicals
- No danger of overdosing or release of residual disinfectant

 No harmful toxic or significant nontoxic disinfection by-products

The UV Disinfection Solution

The medium pressure UV lamps in the Hyde GUARDIAN Gold system produce a polychromatic output across the entire germicidal spectrum versus the monochromatic output achieved with low pressure UV lamps. The UV lamps have an expected service life of 5,000+ operating hours which allows for hundreds of typical ballasting cycles. Hyde Marine systems in service for over 10 years have not experienced issues with lamp failure or breakage.

Treatment Chamber

The Hyde GUARDIAN Gold UV system includes a specific number and size of UV lamps depending on the ballast water flow to be treated. These lamps

are housed in high quality quartz sleeves mounted perpendicular to the flow in the corrosion resistant treatment chamber. The system employs an automatic wiping mechanism to keep deposits from accumulating on the sleeves. Each UV reactor contains a temperature sensor, a UV intensity sensor, and a drain. The reactor chamber has an inspection and access hatch for routine checks and maintenance of reactor internals. Recent improvements include the addition of UV reactor level and moisture sensors for increased safety and cation of the UV cooling valve to the top of the UV

relocation of the UV cooling valve to the top of the UV reactor chamber for improved air removal.



A company of firsts

Hyde Marine was in the first group of companies to receive Alternative Management System (AMS) approval from the U.S. Coast Guard (USCG) on April 15, 2013 for its Hyde GUARDIAN BWTS. Additionally, the Hyde GUARDIAN BWTS was among the first to receive IMO Type Approval from Lloyd's Register on behalf of the U.K. Maritime and Coast Guard Agency (MCA) in April 2009. Hyde Marine installed one of the first BWTS aboard a ship (M/S Coral Princess), which subsequently was the first BWTS accepted into the U.S. Coast Guard's Shipboard Technology Evaluation Program (STEP) and was the company's first retrofit installation. Building upon the ten years of shipboard experience, Hyde Marine now leads the ballast water treatment market in retrofit installations.

Hyde Marine is in the process of updating AMS approval along with ATEX and other class approvals for the new IMO Type Approved Hyde GUARDIAN Gold BWTS. Additionally, Hyde Marine has applied for testing under an Independent Laboratory in 2014 for USCG Type Approval.

Calgon Carbon's UV Technologies Division and Hyde Marine received ISO 9001:2008 accreditation from the registrar Det Norske Veritas (DNV) and the ANAB National Accreditation Board in 2010.

"Hyde Marine's commitment to providing superior service and support will drive continued success for clients as the industry works to comply with pending ballast water treatment requirements."

- Rob McBurney, Commercial Director of Cammell Laird

APPROVALS HYDE GUARDIAN BWTS HAS ACHIEVED














LEAVE NOTHING BUT YOUR WAKE.


Hyde GUARDIAN	Max Flow			Power (KW)	Filter			UV			Power Panel				Control Cabinet							
Gold® BWTS	(m³/hr)	Filter Model #	UV Model #	nom/max/BW*	L1 (mm)	W1(mm)	H1(mm)	kg	L2 (mm)	W2 (mm)	H2 (mm)	kg	L3 (mm)	W3 (mm)	H3 (mm)	kg°	Qty	L4 (mm)	W4 (mm)	H4 (mm)	kg	Tot.(kg)
HG60G	60	FC100	UV8B	7/10/5	390	430	840	105	680	430	930	135	800	400	1200	135	1	600	210	760	80	455
HG100G	100	FC150	UV16A	10/15/5	420	460	940	130	950	530	1190	135	1200	405	1800	365	1	600	210	760	80	710
HG150G	150	FC150H	UV16A	10/15/5	420	460	1000	190	950	530	1190	135	1200	405	1800	365	1	600	210	760	80	770
HG250G	250	FC200	UV16B	18/25/10	470	500	1150	290	950	530	1075	125	1200	405	1800	415	1	600	210	760	80	910
HG300G	300	FC200H	UV16C	24/34/10	480	520	1200	320	950	530	1075	130	1200	405	1800	470	1	600	210	760	80	1000
HG450G	450	FC250	UV20A	36/50/10	910	750	1960	550	950	530	935	210	1200	405	1800	575	1	600	210	760	80	1415
HG500G	500	FC250	UV20A	36/50/10	910	750	1960	550	1110	630	1120	210	1200	405	1800	575	1	600	210	760	80	1415
HG600G	600	FC300	UV20A	36/50/10	1030	850	1980	725	1110	630	1120	210	1200	405	1800	575	1	600	210	760	80	1590
HG700G	700	FC300	UV20B	53/75/10	1030	850	1980	725	1110	630	1120	205	1200	405	1800	990	2	600	210	760	80	2000
HG1000G	1000	FC400	UV20B	53/75/10	970	1090	2025	875	1110	630	955	205	1200	405	1800	990	2	600	210	760	80	2150
HG1250G	1250	FC450	UV20C	78/114/10	1130	1260	2125	1190	1110	630	955	200	1800	800	1800	1790	1	600	210	760	80	3260
HG1500G	1500	FC450	UV20C	78/114/10	1130	1260	2125	1190	1110	630	860	200	1800	800	1800	1790	1	600	210	760	80	3260
HG2000G	2000	FC500	UV20B x 2	106/150/10	1240	1370	2210	1355	1110	630	955	410	1200	405	1800	3960	4	600	210	760	160	5885
HG2500G	2500	FC600	UV20C x 2	156/228/15	1440	1600	2385	2580	1110	630	955	400	1800	800	1800	3580	2	600	210	760	160	6720
HG3000G	3000	FC600	UV20C x 2	156/228/15	1440	1600	2385	2580	1110	630	860	400	1800	800	1800	3580	2	600	210	760	160	6720
HG4000G	4000	FC500 x 2	UV20B x 4	212/300/20	1240	1370	2210	2710	1110	630	955	820	1200	405	1800	7920	8	600	210	760	320	11770
HG5000G	5000	FC600 x 2	UV20C x 4	312/456/30	1440	1600	2385	5160	1110	630	955	800	1800	800	1800	7160	4	600	210	760	320	13440
HG6000G	6000	FC600 x 2	UV20C x 4	312/456/30	1440	1600	2385	5160	1110	630	860	800	1800	800	1800	7160	4	600	210	760	320	13440

¹ - For reference only. Technical specifications are subject to change without notice. Weights (kg) shown in chart represent totals based on the number of individual components. *Backwash Pump (if included)
*Does not include base frame (70 kg)







Filter (FC100 - FC200H)




Filter (FC250 - FC600)



UV



Power Panel



Control Panel

Hyde Marine, Inc.

2000 McClaren Woods Drive, Coraopolis, PA 15108 USA | +1.724.218.7001 | sales@hydemarine.com | hydemarine.com

Specifications are subject to change without prior notice.

Hyde Marine, Hyde GUARDIAN Gold, and LEAVE NOTHING BUT YOUR WAKE are registered trademarks of Hyde Marine, Inc. © Copyright 2014 Hyde Marine, Inc. All rights reserved.





One of the most well-trained, knowledgeable, and experienced networks of global BWTS service providers and technicians available that offer:

- Installation services
- Commissioning services
- Maintenance services
- Repairs, spare parts, and technical support

Service technicians and spare/replacement parts dispatched expediently to all major ports minimizing operational downtime.



Spare parts warehoused globally with a 24 hour guarantee delivery for quick replacement to keep your system running smoothly and your ship moving on time.

Commitment to Training

Large investment in training materials, equipment, resources, and top instructors offering:

- On-board crew training during commissioning
- Other in-depth classroom training packages depending on your role with BWTS
- Mobile control panel training consoles for more tangible interactions



- Ability to remotely access equipment to conduct on-line software updates, training, and troubleshooting
- Availability of small electronic/virtual technician consoles that can be dispatched to vessels that require immediate (nonemergency) attention/service



Hyde Marine can assess your BWTS annually or provide re-commissioning services for vessels that have not started BWTS operation to ensure the system is operating properly and to make sure the crew knows how to operate the equipment.

Vessel General Permit (VGP) Sampling

Did you Know?

Vessels calling on the United States that discharge and treat ballast water are required to sample two times per year.

In conjunction with an esteemed laboratory partner, Hyde Marine offers an efficient and economical solution for on-board sampling through the B-Box sampling kit.

A Hyde Marine technician will collect the water sample while on site. After the sample has been analyzed at an off-site laboratory, results will be sent to the Owner/Ship Operator.

*2013 Vessel General Permit Ruling; after two successful tests, sampling will only be required once per year.



For Service, Tech Support, & Parts call:

• 1.855.HYDEBWT (1.855.493.3298)



Hyde GUARDIAN Gold® Ballast Water Treatment System Standard Product Offering*

Hyde GUARDIAN				Power (KW)
Gold [®] BWTS	Max Flow (m ³ /hr)	Filter Model #	UV Model #	nom/max/BW°
HG60G	60	FC100	UV8B	7/10/5
HG100G	100	FC150	UV16A	10/15/5
HG150G	150	FC150H	UV16A	10/15/5
HG250G	250	FC200	UV16B	18/25/10
HG300G	300	FC200H	UV16C	24/34/10
HG450G	450	FC250	UV20A	36/50/10
HG500G	500	FC250	UV20A	36/50/10
HG600G	600	FC300	UV20A	36/50/10
HG700G	700	FC300	UV20B	53/75/10
HG1000G	1000	FC400	UV20B	53/75/10
HG1250G	1250	FC450	UV20C	78/114/10
HG1500G	1500	FC450	UV20C	78/114/10
HG2000G	2000	FC500	UV20B x 2	106/150/10
HG2500G	2500	FC600	UV20C x 2	156/228/15
HG3000G	3000	FC600	UV20C x 2	156/228/15
HG4000G	4000	FC500 x 2	UV20B x 4	212/300/20
HG5000G	5000	FC600 x 2	UV20Cx4	312/456/30
HG6000G	6000	FC600 x 2	UV20C x 4	312/456/30

^{*}Custom sizes available upon request.

LEAVE NOTHING BUT YOUR WAKE.







Hyde Marine, Inc.

2000 McClaren Woods Drive, Coraopolis, PA 15108 USA +1.724.218.7001 | sales@hydemarine.com | hydemarine.com

Specifications are subject to change without prior notice.

 $Hyde\ Marine, Hyde\ GUARDIAN, Hyde\ GUARDIAN\ Gold, LEAVE\ NOTHING\ BUT\ YOUR\ WAKE, The\ Gold\ Standard\ in\ Ballast\ Water\ Treatment\ are\ registered\ trademarks\ of\ Hyde\ Marine, Inc.\ @\ Copyright\ 2014\ Hyde\ Marine, Inc.\ All\ rights\ reserved.$



[°]Backwash Pump (if included)